

COMBINATION STACK DRYER/DRYER – 50 Hz

MLE/MLG27PDFGW



COIN DROP EQUIPPED
MLE/MLG27PDFGW



LARGE CAPACITY

- Two 7.4 cu. ft. capacity dryers allow for large loads to be dried effectively
- Delivers an optimal drying experience for users and helps maximize productivity



CONTROLS TO MEET YOUR NEEDS

- An intuitive setup with easily programmable controls
- Allows owners to take control of their revenue streams with time-of-day pricing and additional costs for end-user upgrades
- Simple, one-touch cycle selection provides clear options for end users
- USB port enables the import and export of cycle settings, audit data, and software updates



FRONT-ACCESS PANEL

- Streamlines self-service by providing quick entry to the motor, transmission, and wash tub
- Minimizes downtime to help keep the machine running



BUILT TO LAST

- Porcelain enamel top – a durable finish that stands up to the demands of high traffic
- Front-panel accessibility – provides fast entry to internal components for streamlined self-service
- Blower guard – reduces service calls, helping to keep machines running at optimal turns

SINGLE-LOAD STACK DRYER/DRYER – 50 H z

FUEL TYPE	MODEL NUMBER	PAYMENT CONFIGURATION
Electric	MLE27PDFGW	Coin Drop Equipped
Gas	MLG27PDFGW	Coin Drop Equipped



AMERICA
AN AMERICAN COMPANY FOR OVER 100 YEARS

See maytagcommerciallaundry.com for warranty details.

VISIT MAYTAGCOMMERCIALLAUNDRY.COM FOR MORE INFORMATION.

®/™ © 2024 Maytag. All rights reserved.
MY240387 10/24




DISTRIBUTORS FOR
South & West India
Mobile No.: +91 9902203143
Email: abinay@klenlaundro.com

COMBINATION STACK DRYER/DRYER – 50 Hz


MLE/MLG27PDFGW



SIDE VIEW

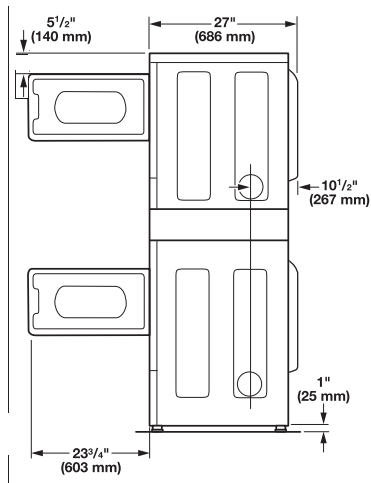

BACK VIEW

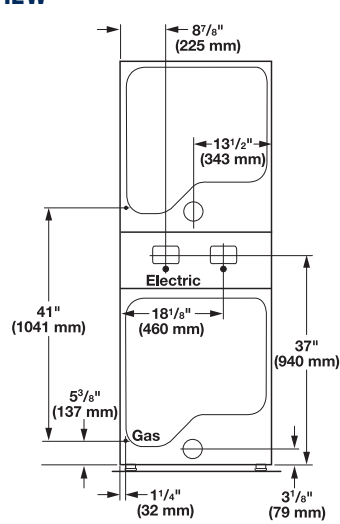

MAXIMUM EXHAUST DUCT LENGTH PER NUMBER OF TURNS

Number of 90° Turns	  	
	Box Hood and Louvered Style	Angled Hood Style
0	39.6 m (130 ft.)	39.3 m (129 ft.)
1	38.1 m (125 ft.)	36.3 m (119 ft.)
2	35.1 m (115 ft.)	33.2 m (109 ft.)
3	32.3 m (106 ft.)	30.5 m (100 ft.)
4	29.9 m (98 ft.)	28.0 m (92 ft.)

MODELS	MLE27PDFGW	MLG27PDFGW
FUEL TYPE	Electric	Gas
CAPACITY		
Cylinder Volume – cu. ft. (liters)	7.4 (209.5)	7.4 (209.5)
Cylinder Diameter – in. (mm)	26.26 (667)	26.26 (667)
Cylinder Depth – in. (mm)	23.2 (590)	23.2 (590)
DIMENSIONS		
Width – in. (mm)	27 (686)	27 (686)
Depth – in. (mm)	29 (737)	29 (737)
Height – in. (mm)	76.75 (1,950)	76.75 (1,950)
Door Opening – in. (mm)	20.25 (514)	20.25 (514)
Exhaust Duct Diameter – in. (mm)	4 (101.6)*	4 (101.6)*
CRATED DIMENSIONS		
Crated Width – in. (mm)	28.7 (730)	28.7 (730)
Crated Depth – in. (mm)	33.4 (848)	33.4 (848)
Crated Height – in. (mm)	79.1 (2008)	79.1 (2008)
APPROXIMATE WEIGHT		
Uncrated – lb (kg)	272 (123.4)	272 (123.4)
Crated – lb (kg)	294 (133.4)	294 (133.4)
ELECTRICAL REQUIREMENTS		
Voltage	220-240V 50Hz	220-240V 50Hz
Breaker/Fuse – amps	30	15
Airflow – CFM (CMM)	215 (6.1)	230 (6.5)
Electric Heating Element (watts)	4,600	N/A
Gas Rating – BTU/hr (kcal/hr)	N/A	24,000 (6,048)
Gas Inlet Size – in.	N/A	3/8 N.P.T.
Motor Size – HP (kW)	1/3 (.25)	1/3 (.25)



*Use 4" (100 mm) diameter rigid aluminum or galvanized steel duct.
Never use plastic, non-metal or combustible duct.
See specific instructions for proper installation. Because of continuous product improvement, Maytag reserves the right to change specifications without notice.

VISIT MAYTAGCOMMERCIALLAUNDRY.COM FOR MORE INFORMATION.

®/™ © 2024 Maytag. All rights reserved.
MY240387 10/24



DISTRIBUTORS FOR

South & West India
Mobile No.: +91 9902203143
Email: abinay@klenlaundro.com