


SINGLE-LOAD TOP-LOAD MATCHING DRYERS

MDE20MNTGW and MDG20MNTGW



NON-VEND
MDE20MNTGW pictured
(Also available in Gas)



TURBOVENT® SYSTEM

- Enables installation in long or complicated venting environments
- Helps improve component life



- High airflow helps reduce drying times for a wide variety of loads



CONTROLS TO MEET YOUR NEEDS

- Simple user interface with robust, easy-to-use knobs



- In-use light helps keep users informed



LARGE CAPACITY

- 7.4 cu. ft. capacity dryer helps allow for large loads to be dried efficiently and effectively
- 10.5 kg rated capacity
- Delivers an optimal drying experience for users and helps maximize productivity



- Extra-large reversible door – provides users unhindered access while loading and unloading



BUILT TO LAST

- Porcelain enamel top – a durable finish that stands up to the demands of high traffic
- Blower guard – protects components to reduce service calls
- Full wrap console – designed to help protect the internal components
- Front-panel accessibility – provides fast entry to internal components for streamlined service
- Four-roller suspension – provides dependable operation and longer life



AMERICA
AN AMERICAN COMPANY FOR OVER 100 YEARS

See maytagcommerciallaundry.com for warranty details.



End user benefits

VISIT MAYTAGCOMMERCIALLAUNDRY.COM FOR MORE INFORMATION.

®/™ © 2023 Maytag. All rights reserved.
MY220179 01/23



DISTRIBUTORS FOR

South & West India

Mobile No.: +91 9902203143


Email: abinay@klenlaundro.com

SINGLE-LOAD TOP-LOAD MATCHING DRYERS


MDE20MNTGW and MDG20MNTGW



SIDE VIEW

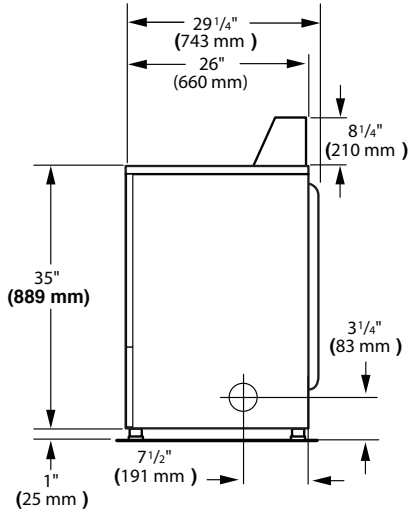

BACK VIEW

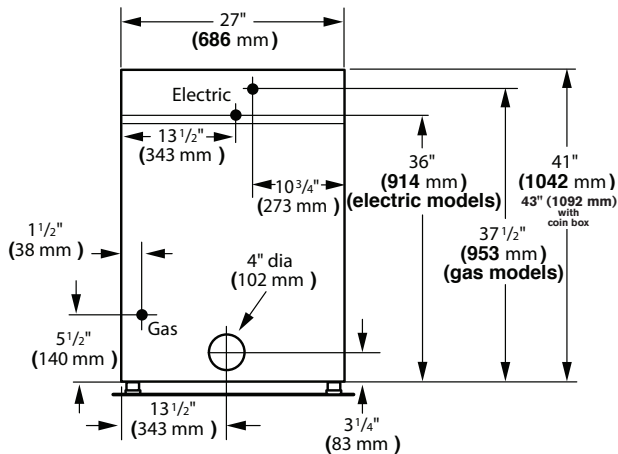

MAXIMUM EXHAUST DUCT LENGTH PER NUMBER OF TURNS

Number Of 90° Turns		
	Box Hood and Louvered Style	Angled Hood Style
0	64 ft. (19.5 m)	58 ft. (17.7 m)
1	54 ft. (16.5 m)	48 ft. (14.6 m)
2	44 ft. (13.4 m)	38 ft. (11.6 m)
3	35 ft. (10.7 m)	29 ft. (8.8 m)
4	27 ft. (8.2 m)	21 ft. (6.4 m)

MODELS	MDE20MNTGW	MDG20MNTGW
PAYMENT CONFIGURATION	Non-Vend	
FUEL TYPE	Electric	Gas
CAPACITY		
Cylinder Volume – cu. ft. (liters)	7.4 (210)	7.4 (210)
Cylinder Diameter – in. (mm)	26.26 (667)	26.26 (667)
Cylinder Depth – in. (mm)	23.2 (590)	23.2 (590)
IEC Capacity – lb. (kg)	23.2 (10.5)	23.2 (10.5)
DIMENSIONS		
Width – in. (mm)	27 (686)	27 (686)
Depth – in. (mm)	29.25 (743)	29.25 (743)
Height – in. (mm)	43 (1,092)*	43 (1,092)*
Door Opening – in. (mm)	20.25 (514)	20.25 (514)
Exhaust Duct Diameter – in. (mm)	4 (102)**	4 (102)**
CRATED DIMENSIONS		
Crated Width – in. (mm)	28.8 (731)	28.8 (731)
Crated Depth – in. (mm)	30.8 (782)	30.8 (782)
Crated Height – in. (mm)	44.65 (1,134)	44.65 (1,134)
APPROXIMATE WEIGHT		
Uncrated – lb. (kg)	115 (52.2)	127 (57.6)
Crated – lb. (kg)	125 (56.7)	137 (62.1)
ELECTRICAL REQUIREMENTS		
Voltage	220-240V	220-240V
Frequency	50Hz	50Hz
Breaker/Fuse – Amps	25	10
Airflow – CFM (CMM)	215 (6.10)	230 (6.50)
Electric Heating Element (watts)	4,600	N/A
Gas Rating – BTU/hr (kcal/hr)	N/A	20,000 (5,040)
Gas Inlet Size – in.	N/A	3/8 N.P.T.
Motor Size – HP (kW)	1/3 (.25)	1/3 (.25)



*Includes height of metercase for coin drop and coin slide models
 **Use 4" (102 mm) diameter rigid aluminum or galvanized steel duct. Never use plastic, non-metal, or combustible duct.

Dimensions are for planning purposes only. See specific instructions for proper installation. Because of continuous product improvement, Maytag reserves the right to change specifications without notice.